
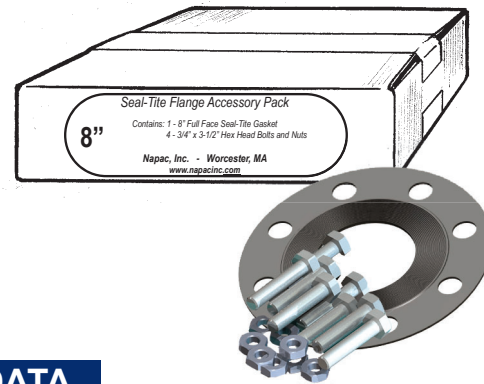


Grooved Flange Adapter

with Optional Seal-Tite Flange Accessory Pack

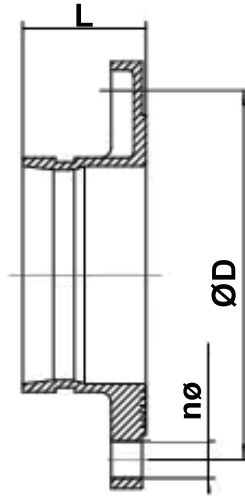

DIMENSIONAL DATA

Nominal Pipe Size	Part No.	Part No. w/Accessories	L	Grooved End Pipe O.D.	B.C.	Bolt Size	Qty.	Est. Shipping Wgt.
2	GFA-201	GFA-201ACC	2.55	2.37	4.75	5/8 x 2-1/2	4	2.4
2-1/2	GFA-202	GFA-202ACC	2.36	2.87	5.50	5/8 x 2-1/2	4	3.4
3	GFA-203	GFA-203ACC	2.55	3.5	6.00	5/8 x 2-1/2	4	3.9
4	GFA-204	GFA-204ACC	2.75	4.5	7.50	5/8 x 3	8	5.7
6	GFA-206	GFA-206ACC	2.75	6.62	9.50	3/4 x 3-1/2	8	9.0
8	GFA-208	GFA-208ACC	3.15	8.62	11.75	3/4 x 3-1/2	8	14.6
10	GFA-210	GFA-210ACC	3.34	10.75	14.25	7/8 x 4	12	19.1
12	GFA-212	GFA-212ACC	3.54	12.75	17.00	7/8 x 4	12	26.9

Description:

1. Material: High strength ductile iron, ASTM A536, Grade 65-45-12
2. Flange End: Drilled in accordance with ANSI B16.1 Class 125
3. Grooved End: Conforms to AWWA C606 Standard
4. Flexible joint
5. Fusion bonded epoxy coated
6. Working Pressure: 300 psi
7. Available with or without Seal-Tite Flange Accessory Pack



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers

229 Southbridge Street, Worcester, MA 01608
 Tel: (800) 807-2215 Fax: (800) 807-2214
www.napacinc.com

Jacksonville, Florida