

Wide Range Coupling


MATERIAL LIST

1. Middle Ring Ductile Iron
ASTM A536
Grade 65-45-12
2. End Ring Ductile Iron
ASTM A536
Grade 65-45-12
3. Gasket EPDM
4. Bolt High Strength
Zinc Coated
Steel*
5. Nut High Strength
Zinc Coated
Steel
6. Washer High Coated
Zinc Plated
Steel
7. Coating Fusion Bonded
Epoxy Coated
to 200 Microns**

* Stainless Steel Type 304
Optional

** NSF 61 Approved Material

Working Pressure: 250 psi

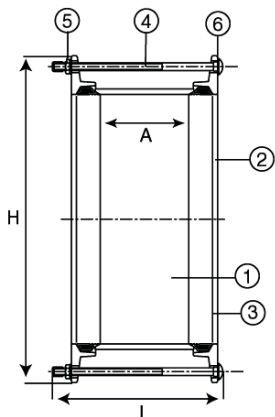

SERIES 4200



Part Number	Nominal Diameter DN Inches	OD Range		L Bolt Length	No. of Bolts	H		A Sleeve Length	Weight Kgs. Lbs.
		mm	inch			mm	inch		
4200-020	DN40	48-60		M12 x 200	2	148	100	3.0	
	1.5	1.89-2.36		1/2 x 7.8		5.8	4		6.5
4200-025	DN50	59-72		M12 x 200	2	166	100	4.0	
	2	2.32-2.84		1/2 x 7.8		6.5	4		8.0
4200-030	DN65	72-85		M12 x 200	2	180	100	4.5	
	2.5	2.84-3.35		1/2 x 7.8		7.1	4		10.0
4200-035	DN80	88-103		M12 x 225	4	203	125	6.5	
	3	3.46-4.06		1/2 x 8.8		8.0	5		14.0
4200-040	DN100	109-128		M12 x 225	4	228	125	6.5	
	4	4.29-5.04		1/2 x 8.8		9.0	5		14.0
4200-045	DN125/150	132-146		M12 x 225	4	244	125	7.0	
	5/6	5.20-5.75		1/2 x 8.8		9.6	5		15.0
4200-050	DN125/150	138-153		M12 x 225	4	251	125	7.0	
	5/6	5.43-6.02		1/2 x 8.8		9.9	5		15.0
4200-055	DN150	159-182		M12 x 225	4	277	125	8.5	
	6	6.26-7.16		1/2 x 8.8		10.9	5		19.0
4200-060	DN200	192-210		M12 x 225	6	310	125	11.5	
	8	7.60-8.26		1/2 x 8.8		12.2	5		25.0
4200-065	DN200	218-235		M12 x 225	6	340	125	11.5	
	8	8.58-9.25		1/2 x 8.8		13.4	5		25.0
4200-070	DN200	230-247		M12 x 225	6	347	125	12.0	
	8	9.06-9.72		1/2 x 8.8		13.7	5		26.0
4200-075	DN250	250-267		M12 x 225	6	371	125	15.0	
	10	9.84-10.51		1/2 x 8.8		14.6	5		33.0
4200-080	DN250	272-289		M12 x 225	6	395	125	18.0	
	10	10.70-11.38		1/2 x 8.8		15.6	5		40.0
4200-085	DN300	315-332		M12 x 225	8	438	125	19.0	
	12	12.40-13.07		1/2 x 8.8		17.2	5		42.0
4200-090	DN300	322-339		M12 x 225	8	442	125	21.0	
	12	12.68-13.35		1/2 x 8.8		17.4	5		45.0
4200-095	DN300	332-349		M12 x 225	8	453	125	23.0	
	12	13.07-13.74		1/2 x 8.8		17.8	5		50.0
4200-100	DN350	374-391		M16 x 320	8	508	200	36.0	
	14	14.72-15.39		5/8 x 12.5		20.0	8		78.0
4200-110	DN400	418-435		M16 x 320	8	551	200	40.0	
	16	16.45-17.12		5/8 x 12.5		21.7	8		86.0
4200-120	DN450	476-493		M16 x 320	10	622	200	53.0	
	18	18.74-19.41		5/8 x 12.5		24.5	8		116.0
4200-130	DN500	527-544		M16 x 320	10	672	200	60.0	
	20	20.75-21.42		5/8 x 12.5		26.5	8		132.0
4200-140	DN600	630-647		M16 x 320	10	776	200	72.0	
	24	24.80-25.47		5/8 x 12.5		30.6	8		158.0

ORDERS FAX 800-807-2214