


Wide Range Adapter

SERIES 4400

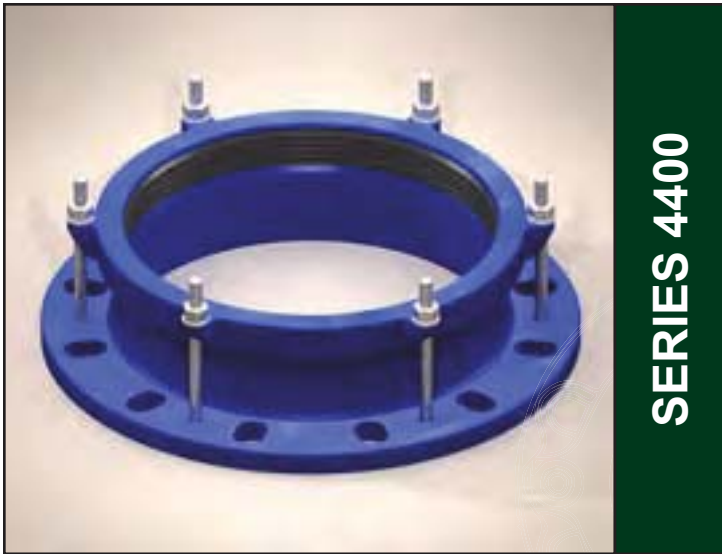

MATERIAL LIST


1. Body Ductile Iron
 ASTM A536
 Grade 65-45-12
2. End Ring Ductile Iron
 ASTM A536
 Grade 65-45-12
3. Gasket EPDM
4. Bolt High Strength
 Zinc Coated
 Steel*
5. Nut High Strength
 Zinc Coated
 Steel
6. Washer High Coated
 Zinc Plated
 Steel
7. Coating Fusion Bonded
 Epoxy Coated
 to 200 Microns**

| Part Number | Nominal Diameter | OD Range | L | No. of Bolts | D | H | A | Weight |
|-------------|------------------|-------------|------------|--------------|-------|-------|-------|--------|
| | DN Inches | | | | | | | |
| 4428-025 | DN50 | 59-72 | M12 x 135 | 2 | 165 | 166 | 75 | 3.5 |
| | 2 | 2.32-2.84 | 1/2 x 5.3 | | 6.4 | 6.40 | 3 | 7.5 |
| 4428-030 | DN65 | 72-85 | M12 x 135 | 2 | 185 | 180 | 75 | 4.5 |
| | 2.5 | 2.84-3.35 | 1/2 x 5.3 | | 7.2 | 7.02 | 3 | 9.5 |
| 4428-035 | DN80 | 88-103 | M12 x 135 | 4 | 200 | 203 | 75 | 5.5 |
| | 3 | 3.46-4.06 | 1/2 x 5.3 | | 7.8 | 7.30 | 3 | 11.5 |
| 4428-040 | DN100 | 109-128 | M12 x 135 | 4 | 229 | 228 | 75 | 6.0 |
| | 4 | 4.29-5.04 | 1/2 x 5.3 | | 9.02 | 8.98 | 3 | 13.0 |
| 4428-045 | DN125/150 | 132-146 | M12 x 135 | 4 | 279.4 | 244 | 75 | 7.5 |
| | 5/6 | 5.20-5.75 | 1/2 x 5.3 | | 11 | 9.61 | 3 | 16.0 |
| 4428-050 | DN125/150 | 138-153 | M12 x 135 | 4 | 279.4 | 252 | 75 | 7.5 |
| | 5/6 | 5.43-6.02 | 1/2 x 5.3 | | 11 | 9.83 | 3 | 16.0 |
| 4428-055 | DN150 | 159-182 | M12 x 155 | 4 | 279.4 | 277 | 75 | 8.5 |
| | 6 | 6.26-7.16 | 1/2 x 6.1 | | 11 | 10.91 | 3 | 18.0 |
| 4428-060 | DN200 | 192-210 | M12 x 155 | 4 | 340 | 310 | 75 | 11.0 |
| | 8 | 7.60-8.26 | 1/2 x 6.1 | | 13.2 | 12.20 | 3 | 24.0 |
| 4428-065 | DN200 | 218-235 | M12 x 155 | 4 | 340 | 341 | 75 | 11.5 |
| | 8 | 8.58-9.25 | 1/2 x 6.1 | | 13.2 | 13.43 | 3 | 24.5 |
| 4428-075 | DN250 | 250-267 | M12 x 155 | 6 | 406.4 | 371 | 75 | 14.5 |
| | 10 | 9.84-10.51 | 1/2 x 6.1 | | 16 | 14.60 | 3 | 31.0 |
| 4428-080 | DN250 | 272-289 | M12 x 155 | 6 | 406.4 | 395 | 90 | 15.0 |
| | 10 | 10.70-11.38 | 1/2 x 6.1 | | 16 | 15.55 | 3 1/2 | 32.0 |
| 4428-085 | DN300 | 315-332 | M12 x 155 | 6 | 482.6 | 438 | 90 | 20.0 |
| | 12 | 12.40-13.07 | 1/2 x 6.1 | | 19 | 17.24 | 3 1/2 | 43.0 |
| 4428-090 | DN300 | 322-339 | M12 x 155 | 6 | 482.6 | 442 | 100 | 20.5 |
| | 12 | 12.68-13.35 | 1/2 x 6.1 | | 19 | 17.40 | 4 | 45.0 |
| 4428-095 | DN300 | 332-349 | M12 x 155 | 6 | 482.6 | 453 | 90 | 21.5 |
| | 12 | 13.07-13.74 | 1/2 x 6.1 | | 19 | 17.83 | 3 1/2 | 47.0 |
| 4428-100 | DN350 | 374-391 | M16 x 200 | 8 | 520 | 508 | 130 | 28.0 |
| | 14 | 14.72-15.39 | 5/8 x 7.98 | | 20.4 | 20.00 | 5 | 64.0 |
| 4428-110 | DN400 | 418-435 | M16 x 200 | 8 | 580 | 552 | 130 | 35.0 |
| | 16 | 16.45-17.12 | 5/8 x 7.98 | | 23.2 | 21.73 | 5 | 77.0 |
| 4428-120 | DN450 | 476-493 | M16 x 200 | 10 | 636 | 622 | 130 | 41.0 |
| | 18 | 18.74-19.41 | 5/8 x 7.98 | | 25 | 24.49 | 5 | 90.0 |
| 4428-130 | DN500 | 527-544 | M16 x 220 | 10 | 710 | 672 | 150 | 54.0 |
| | 20 | 20.75-21.42 | 5/8 x 8.66 | | 27.95 | 26.48 | 6 | 119.0 |
| 4428-140 | DN600 | 630-647 | M16 x 220 | 10 | 835 | 776 | 150 | 71.0 |
| | 24 | 24.80-25.47 | 5/8 x 8.66 | | 32.8 | 30.57 | 6 | 154.0 |

* Stainless Steel Type 304
Optional

** NSF 61 Approved Material

Working Pressure: 250 psi

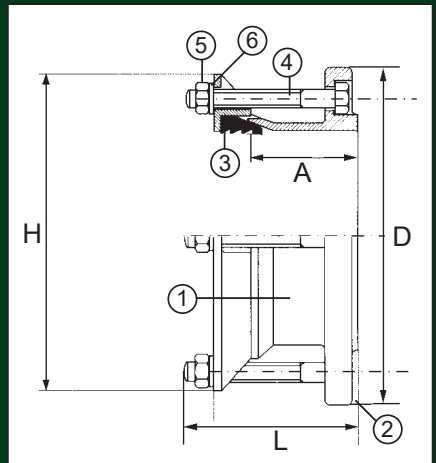

ORDERS FAX 800-807-2214