


Stainless Steel Repair Clamps

UNITED

Cost Effective - Long Lasting Repair on a Variety of Types of Pipe!

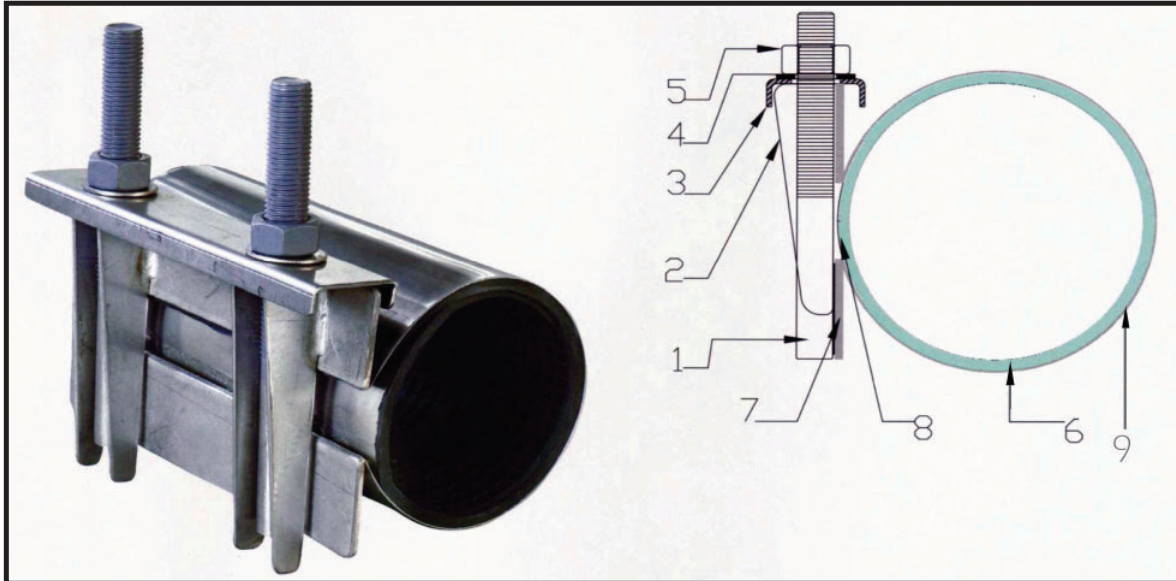

TEMPERATURE RANGE:

-40° F - 212° F

MATERIALS

No.	Part Name	Material
1	Bolt	ASTM A240 type 304 Stainless Steel with Teflon Coating
2	Lug Plate	ASTM A240 type 304 Stainless Steel
3	Lifter Bar	ASTM A240 type 304 Heavy Guage Stainless Steel
4	Washer	Type 304 Stainless Steel or Nylon
5	Nut	ASTM A240 type 304 Stainless Steel - Anti-galling
6	Gridded Gasket	EPDM suitable for potable water and wastewater
7	Side Bar	ASTM A240 type 304 Heavy Guage Stainless Steel
8	Armor	ASTM 240 Type 304 Stainless Steel Integrally Molded into the gasket to ensure even compression against pipe
9	Band	Type 304 Sstainless Steel offering high strength, flexibility & resistance to corrosion on underground pipelines.

DIMENSIONS

Size	OD Range	Length	Bolt	No. of Bolts
4"	4.53" - 5.04"	8"	5/8"	3
		12"		4
6"	6.61" - 7.17"	8"	5/8"	3
		12"		4
8"	8.86" - 9.45"	8"	5/8"	3
		12"		4
10"	10.63" - 11.34"	12"	5/8"	4
12"	13.10" - 13.50"	12"	5/8"	4

**All Welds are Fully
Passivated for
Corrosion Resistance!**



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers


229 Southbridge Street, Worcester, MA 01608
Tel: (800) 807-2215 Fax: (800) 807-2214
www.napacinc.com

Jacksonville, Florida

0119

Stainless Steel Repair Clamp w/Ductile Iron Lugs

UNITED

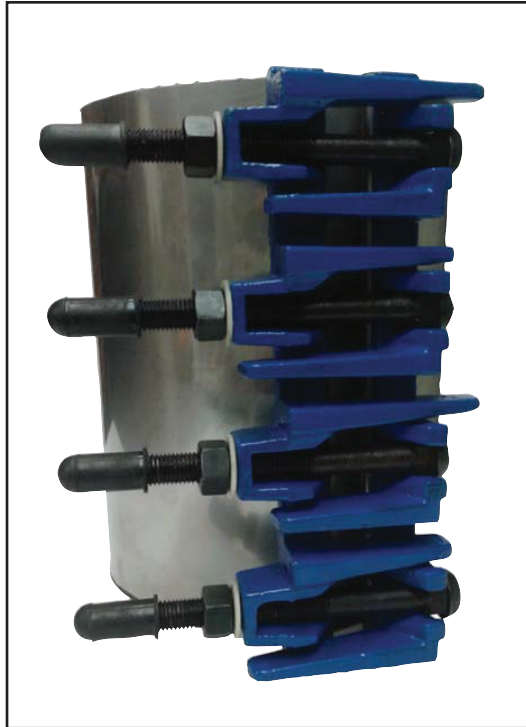

- Lugs • Ductile Iron ASTM A536, 65-12-12
- Bolts & Nuts • Corrosion Resistant High Strength Low Alloy
- Band • Stainless Steel 304
- Gasket • EPDM - Nominal Temperature Range -20° F to 230°F
- Coating • Fusion Bonded Epoxy

Part Number	Size in	Standard			Metric			
		OD RangeW inch	idth inch	Unit Wt. lbs.	DN mm	OD RangeW mm	idth mm	Unit Wt. kgs.
RC25-12-DI	2-1/4 - 2-1/2	2.70-3.01	21	56	5	69-76	3006	.7
RC04-12-DI	44	.74-5.14	12	18	100	121-1303	00	8.1
RC05-12-DI	4-55	.22-5.62	12	18	125	133-1423	00	8.2
RC06-12-DI	66	.84-7.24	12	19	150	174-1833	00	8.9
RC06-18-DI	66	.84-7.24	18	31	150	174-1834	50	14.0
RV08-12-DI	88	.99-9.39	12	21	200	229-2383	00	9.8
RC08-18-DI	88	.99-9.39	18	35	200	229-2384	50	15.9
RC10-12-DI	10	11.04-11.441	22	32	50	281-2903	00	10.5
RC12-12-DI	12	13.10-13.50	12	25	300	333-3423	00	11.6
RC12-18-DI	12	13.10-13.50	18	40	300	333-3424	50	18.6

**RANGE
UP TO
0.4"**

- Corrosion Resistant • Stainless Steel Band •
- Fusion Bonded Epoxy Lugs •
- Drop in Bolts •
- Easy Installation •

**3" ~ 12"
UP TO 350 PSI**



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers

229 Southbridge Street, Worcester, MA 01608
Tel: (800) 807-2215 Fax: (800) 807-2214
www.napacinc.com

Jacksonville, Florida

0119