


**WAFER
DOUBLE DOOR
CHECK VALVE**

Model 2560
Ductile Iron Body
For Fire Protection Service

UNITED



Certified to
NSF/ANSI 61
NSF/ANSI 372

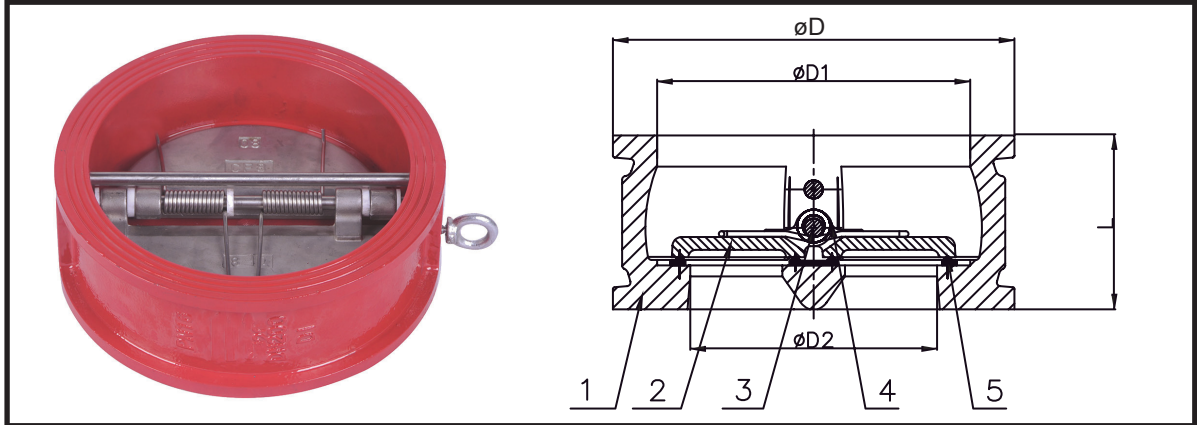

Description:

1. Connection Ends: Compatible with:
ASME B16.1 Class 125 and
ASME B16.5 Class 150 Flanges
2. Working Pressure: 300 PSI
3. Temperature: 0°C to 100°C (32°F to 212°F)
4. Fusion Bonded Epoxy Coated to AWWA C550
5. Vertical or Horizontal installation
6. Short face to face dimension
7. Spring loaded for fast closure
8. Manufactured under a certified ISO 9001 Quality System
9. UL Listed for Fire Protection
10. Manufactured and tested to: UL 312 and API 594.

Applications:

- Fire Protection
- Water and Wastewater
- Marine
- HVAC Systems

MATERIAL LIST

| Item No. | Description | Material |
|----------|-------------|----------------------------------|
| 1 | Body | Ductile Iron ASTM A536, 65-45-12 |
| 2 | Disc | Stainless Steel AISI 316 |
| 3 | Stem | Stainless Steel AISI 420 |
| 4 | Spring | Stainless Steel AISI 304 |
| 5 | Rubber Seat | EPDM |

DIMENSIONS

| Size | Part No. | L | D | D1 | D2 |
|--------|----------|------|-------|-------|-------|
| 2" | 2560-120 | 2.13 | 4.17 | 2.68 | 1.81 |
| 2-1/2" | 2560-125 | 2.36 | 5.00 | 3.07 | 2.36 |
| 3" | 2560-130 | 2.24 | 5.28 | 4.02 | 2.76 |
| 4" | 2560-140 | 2.64 | 6.38 | 4.61 | 3.31 |
| 5" | 2560-150 | 3.27 | 7.64 | 5.71 | 4.53 |
| 6" | 2560-160 | 3.74 | 8.58 | 6.69 | 5.28 |
| 8" | 2560-180 | 5.00 | 10.91 | 8.90 | 7.24 |
| 10" | 2560-200 | 5.51 | 13.23 | 10.43 | 8.66 |
| 12" | 2560-220 | 7.13 | 15.98 | 12.20 | 10.24 |
| 14" | 2560-240 | 7.24 | 17.60 | 14.17 | 11.89 |
| 16" | 2560-260 | 7.52 | 19.88 | 16.14 | 13.78 |

Design and materials are subject to change without notice.
Dimensions in inches



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers

229 Southbridge Street, Worcester, MA 01608

Tel: (800) 807-2215 Fax: (800) 807-2214

www.napacinc.com

Jacksonville, Florida

0720

