


**AWWA C515
Resilient Seat
GATE VALVES**

**Model 1010
Non Rising Stem**



APPROVED
2"~16"

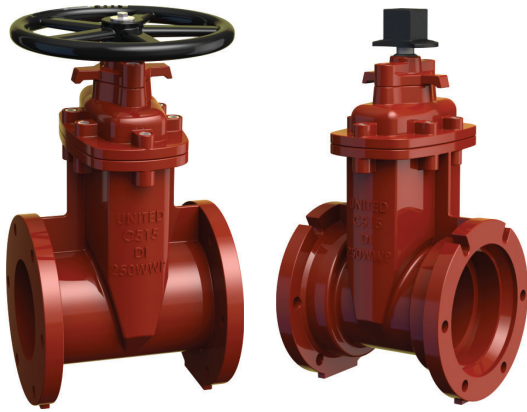

MATERIAL LIST

DESCRIPTION	MATERIAL
Body	Ductile Iron ASTM A536 65-45-12
Wedge	NBR
Wedge Nut	Bronze C86500 (C86200 available for Seawater)
Stem	Stainless Steel AISI 431 (SS304, SS316 for Seawater)
Bonnet	Ductile Iron ASTM A536 65-45-12
Wedge Nut Gasket	NBR
Stem Bushing	Nylon/Brass ASTM B124 C37700
O-ring	NBR
Gland	Ductile Iron ASTM A536 65-45-12
Handwheel/Operating Nut	Ductile Iron ASTM A536 65-45-12
Bonnet Gasket	NBR
Bonnet/Gland Bolt	Stainless Steel AISI 304
Debris Cap	NBR
Handwheel/ Op. Nut Bolt	Stainless Steel AISI 304

Design, dimensions and materials are subject to change without notice.



Open Left




Open Right

Available:


Flange x Flange
MJ x MJ

Description:

1. Conforms to AWWA C515, MSS-SP-70 & MSS-SP-128
2. Fusion Bond Epoxy Coated Interior and Exterior, AWWA C550. Epoxy Powder Certified to NSF-61.
3. 2" square nut or optional handwheel at customer's request.
4. Temperature: 2°C (35°F) to 82°C (180°F)
5. Working Pressure:
3"~24" - 250 psi (2"~16" FM rated)
6. Flanged ends conform with ANSI B16.1 Class 125 Flat Faced.
7. Sizes 14"~24" are furnished with ISO 5211 F16 top flange for mounting actuators.

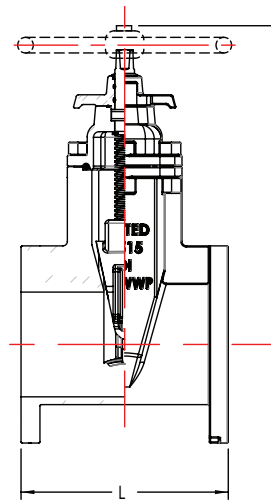

Flange x Flange

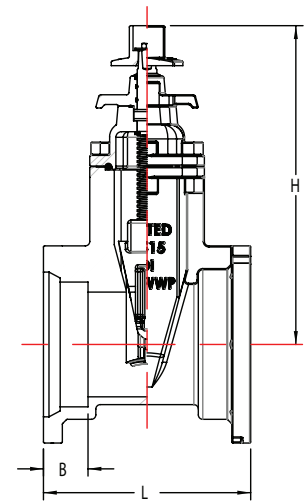

MJ x MJ

DIMENSIONAL DATA

Size	Part No. (Flange x Flange)	L	Part No. (MJ x MJ)	L	B	H	No. of Turns	Handwheel Ø
2"	1010FF-120	7	1010MM-120	8	2.5	10.31	6.5	7
3"	1010FF-130	8	1010MM-130	8	2.5	11.14	10	8
4"	1010FF-140	9	1010MM-140	9	2.5	13.82	13	10
6"	1010FF-160	10.5	1010MM-160	10.5	2.5	17.83	18.5	12
8"	1010FF-180	11.5	1010MM-180	11.5	2.5	22.01	24.5	14
10"	1010FF-200	13	1010MM-200	13	2.5	26.30	30.5	15.7
12"	1010FF-220	14	1010MM-220	14	2.5	29.65	36.5	20
14"	1010FF-240	15	1010MM-240	15	3.5	36.14	45	23.6
16"	1010FF-260	16	1010MM-260	16	3.5	38.39	51	23.6
18"	1010FF-280	17	1010MM-280	17	3.5	41.0	57.5	27.5
20"	1010FF-300	18	1010MM-300	18	3.5	44.0	42.5	27.5
24"	1010FF-340	20	1010MM-340	20	3.5	46.0	51	27.5



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers

229 Southbridge Street, Worcester, MA 01608
Tel: (800) 807-2215 Fax: (800) 807-2214
www.napacinc.com

Jacksonville, Florida




MATERIAL LIST

ITEM NO.	DESCRIPTION	MATERIAL
1	Body	Ductile Iron, ASTM A536
2	Bonnet	Ductile Iron, ASTM A536
3	Wedge	Ductile Iron w/EPDM Encapsulated
4	Spit Ring	Bronze C-83600
5	Stem	431 Stainless Steel
6	Wedge Nut	Bronze 86500
7	Operation Nut or Handwheel	Ductile Iron, ASTM A536
8	Stuffing Box Gland	Ductile Iron, ASTM A536
9	Gasket	EPDM
10	O-Ring	EPDM
11	Fasteners	304 Stainless Steel

Design, dimensions and materials are subject to change without notice.

Description:

1. Conforms to AWWA C515-09, MSS-SP-70
2. Epoxy coated inside and outside to AWWA C550
3. 2" square Operation Nut or optional handwheel at customer's request.
4. Open right valves supplied with red operating nut.
5. Threaded Ends for IPS Pipe
6. Threaded ends conform to ASM B1.20.1
7. WWP: 250 psi

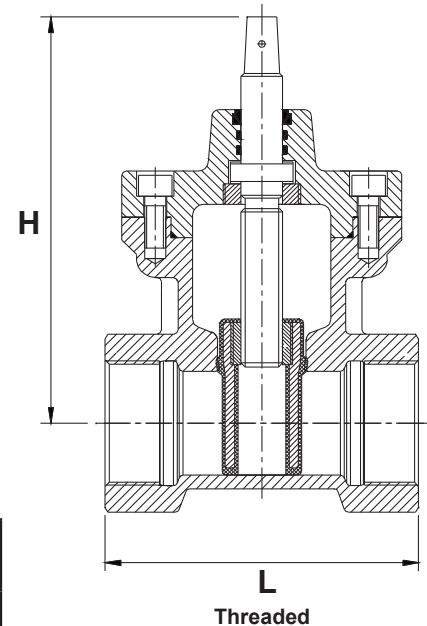

DIMENSIONAL DATA

Size	Part No.	L	H
2"	1010TT-120	7.00	10.50
2-1/2"	1010TT-125	7.50	11.00
3"	1010TT-130	8.00	12.00
4"	1010TT-140	9.00	13.80

Dimensions in inches



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



NAPAC - UNITED Distribution Centers

229 Southbridge Street, Worcester, MA 01608
Tel: (800) 807-2215 Fax: (800) 807-2214
www.napacinc.com

Jacksonville, Florida